

## Reboot factory settings guild for eVic

Sometimes, maybe the factory default settings of your eVic will be reset during upgrading, synchronization time or setting modification. Just like the following picture:




At this time, you need reset through upgrading factory default program. The procedure is as follows.



(Attention: after upgrading this program, all data will turn to the default settings. So please upload vapor data into MVR software before upgrading eVic, avoiding data loss.)

### Method 1

1. Connect eVic to your computer, then click to "Get Data From ecig" upload eVic's data and back up it in your computer.
2. Please copy "code.bin" into "/My Vapor Record/HEX" folder. After connecting eVic to computer, please open MVR software and select "see my vapor record", and click "upgrade my ecig", now it will reboot factory parameter settings of eVic firmware.

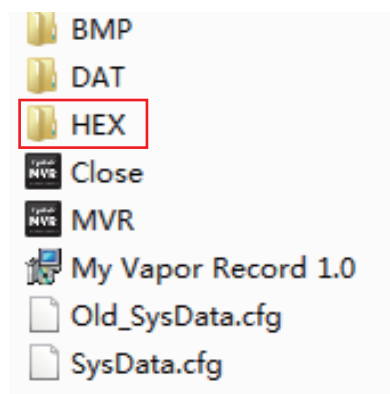


3. Please download eVic V1.1 firmware program from [http://t.joyetech.com/support/down\\_nr.php?id=40](http://t.joyetech.com/support/down_nr.php?id=40), and put "code.bin" file into "My Vapor Record/HEX" folder and replaced old "code.bin" file. Click "upgrade my ecig", now it will reinstall the eVic program.

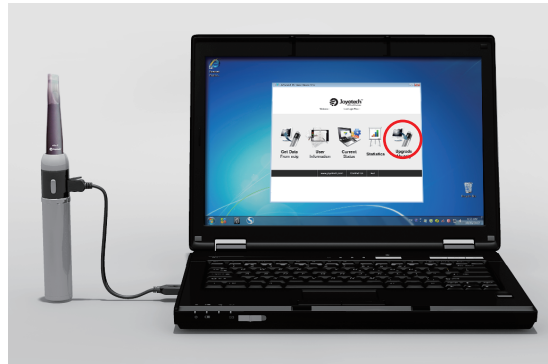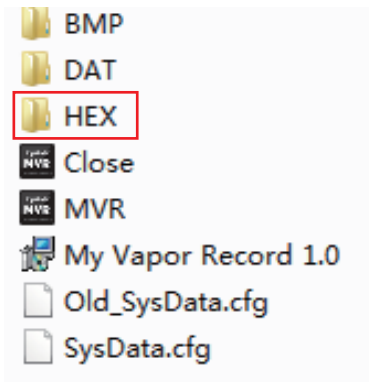

## Method 2

If you couldn't open eVic after upgrading, please use the following method to repair.

- 1 Disconnect the power supply of eVic, press the enter button, insert the USB interface and connect with the computer, keep pressing the enter button for 2 seconds.
2. If it succeeded to wake up the eVic, the computer will display the USB equipment icon 
3. Then you can use MVR to upgrade the eVic again.

## Notice:

1. Please do not disconnect eVic during the installation, or it may cause the program unstable.
2. Please do not change the name of upgrade file, or MVR will be not able to recognize it.